

# Climby Shifter


M7021


KOMPANI®



Item no. M702104-3417P

## General Product Information

Dimensions LxWxH	183x245x217 cm
Age group	3+
Play capacity (users)	7
Colour options	

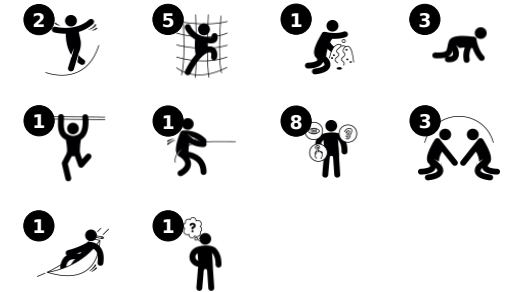

The whimsical Climby Shifter appeals to children's curiosity and makes them come back again and again. The variation of climbing and crawling is intense, with easier and harder climbs to choose from. The sense of wonder is at work thanks to the conscious panel colour use: children climb from red or yellow into a new

combination of colours. The inclined ground panel additionally challenges the senses of balance and proprioception. This makes climbing the Climby Shifter great training for the motor skills and muscles: their cross-coordination and sense of balance need to be on the alert. The wide platforms of the Climby Shifter


invite breaks and offer roomy resting points for children. Thanks to the three panels, children can always find shelter from the wind or the sun. Please notice the fine climbing studs, added to support the whole unit.



Data is subject to change without prior notice.

# Climby Shifter

M7021

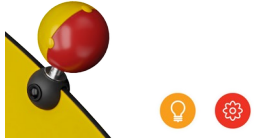

## Turning sphere

**Cognitive:** adds a play destination and stimulates a child's understanding of cause and effect as there is a rattle sound when the sphere is turned. The smooth surface adds tactile variation.

**Creative:** the rattle sound adds a creative element to play.



## Crawl-through hole

**Physical:** the hole allows for climbing and crawling through, developing cross coordination, proprioception and spatial awareness. **Social-Emotional:** cooperation and turn-taking when passing one another. **Cognitive:** understanding space, shape and measures when seeing if the body can fit through the hole.




## Rope ladder

**Physical:** cross coordination is supported when children climb the ladder. The climbing also trains leg and arm muscles.




## Inclined platform

**Physical:** trains the sense of balance and space. **Social-Emotional:** adds meeting points.



## Teardrop handle

**Physical:** develop upper body muscles, when e.g. pulling yourself up or hanging in your arms.

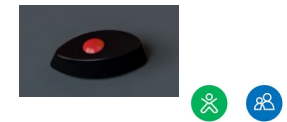

## Climbing cleat

**Physical:** placed to support hands and feet when crawling across, they train dexterity, hand and foot strength. **Social-Emotional:** adds the feeling of security, helping children to feel confident in climbing higher.

# Climby Shifter

M7021



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. M702104-3417P

## Installation Information

Max. fall height	139 cm
Safety surfacing area	20.3 m <sup>2</sup>
Total installation time	8.6 hours
Excavation volume	1.09 m <sup>3</sup>
Concrete volume	0.18 m <sup>3</sup>
Footing depth (standard)	63 cm
Shipment weight	288 kg
Anchoring options	In-ground ✓ Surface ✓

## Warranty Information

EcoCore HDPE	Lifetime
HPL decks	15 years
Hot dip galvanised steel	Lifetime
Ropes & nets	10 years
Spare parts guaranteed	10 years



Play activities like the turning ball is made of injection moulded high quality UV-stabilised nylon (PA6). PA6 has good wearing and impact strength.



Ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated in order to create a strong connection between steel and rope which leads to good wear resistance.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor such as EcoCore™ panels of +95% post consumer recycled ocean waste.



# Sustainability Data

M7021



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled material
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>M702104-3417P</b>	688.53	3.33	49.00

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



## Independent review certificate

Kompan A/S  
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO<sub>2</sub>e-calculations (covering materials, processing, waste and transport) done by Kompan for "Themed Play Systems", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO<sub>2</sub>e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO<sub>2</sub>e.

### Object

The verification has been done on the one pager "MSC542401-3417P" version: 27-10-2025. The supporting documentation "KOMPAN data\_updated emissions factors\_2025\_V2" and "Emissions factors, EPD's and ecoinvent 3.11\_2025" was also reviewed and approved.

### Declaration

The verification has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO<sub>2</sub>e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

**Note:** This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

**Ref.:** Kompan\_Verification report 2025, 28-10-2025

**Date of certificate:** 29-10-2025

**Expire date:** 29-10-2027

**Verified by:** Julie Marie Vejsgaard Larsen, Environmental Auditor


**Signature:**

# Climby Shifter


M7021

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

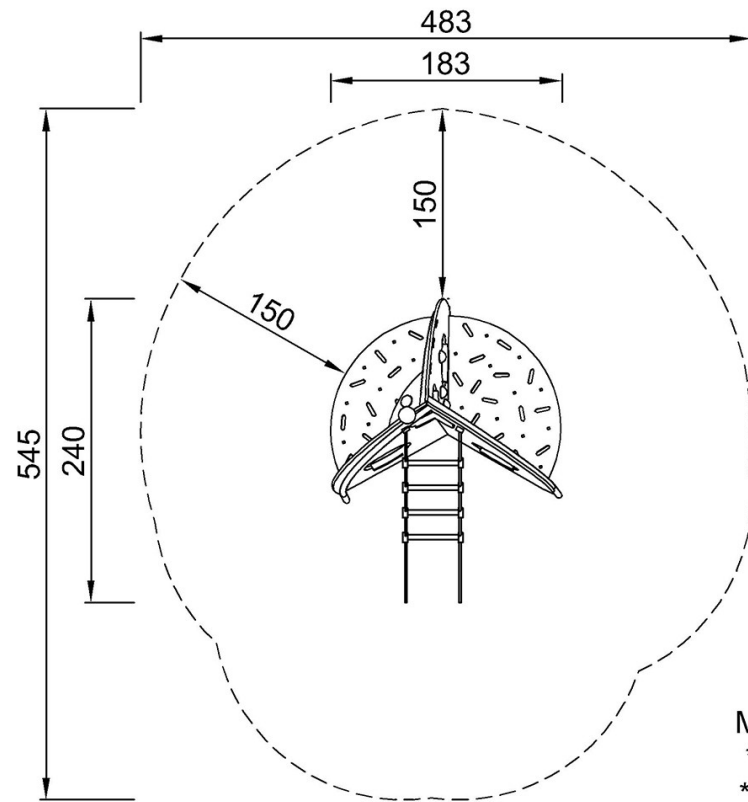

M702106  
\*139cm  
\*\*217cm  
\*\*\*20.3m<sup>2</sup>

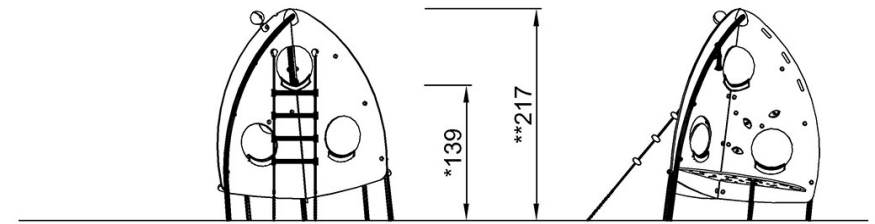

M702106

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)