

Double Springer


NRO103

KOMPANI®



Item no. NRO103-0401

General Product Information

Dimensions LxWxH	20x96x61 cm
Age group	3+
Play capacity (users)	2
Colour options	



The Double Springer is a dense, spring seesaw which attracts children for fun, social rocking again and again. The density of the Double Springer makes cooperation intense. The spring ensures hours of fun. And the soothing, rocking movement of the Double Springer invites play, also in un-equal numbers of


children. The rocking movement trains the senses of balance and space. These are both crucial for body confidence, e.g. in avoiding falling. A well-developed sense of balance is fundamental for the ability to sit still and concentrate. The rhythmic movement takes cooperation and stimulates social-emotional skills

such as empathy and turn-taking. For toddlers and young children, the double springer is a fine entry to wilder, bigger seesaws. But not least, it is a fine entry to active, fun parallel and social play.



Double Springer

NRO103



Handhold
Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.



Rocking spring
Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. **Cognitive:** trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Rocking together
Social-Emotional: the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.

Double Springer

NRO103



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Robinia products are available in three different wood treatment options: Untreated Robinia wood or brown painted with a pigment that maintains the wood colour and coloured version with paint of selected components.

Item no. NRO103-0401

Installation Information

Max. fall height	65 cm
Safety surfacing area	6.7 m ²
Total installation time	2.1 hours
Excavation volume	0.16 m ³
Concrete volume	0.00 m ³
Footing depth (standard)	41 cm
Shipment weight	65 kg
Anchoring options	In-ground ✓ Surface ✓

Warranty Information

Robinia wood	15 years
Stainless steel components	Lifetime
Springs	5 years
Spare parts guaranteed	10 years



Sustainability Data

NRO103



Cradle to Gate A1-A3

Total CO₂ emission

CO₂e/kg

Recycled material

kg CO₂e

kg CO₂e/kg

%

NRO103-0401

132.55

2.40

17.55

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Independent review certificate

Kompan A/S
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO₂e-calculations (covering materials, processing, waste and transport) done by Kompan for "Nature Play", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO₂e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO₂e.

Object

The verification has been done on the one pager "NRO40901-0601" version: 27-10-2025. The supporting documentation "KOMPAN data_updated emissions factors_2025_V2" and "Emissions factors, EPD's and ecoinvent 3.11_2025" was also reviewed and approved.

Declaration

The verification has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO₂e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

Note: This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

Ref.: Kompan_Verification report 2025, 28-10-2025

Date of certificate: 29-10-2025

Expire date: 29-10-2027

Verified by: Julie Marie Vejsgaard Larsen, Environmental Auditor


Signature:

Double Springer

NRO103

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

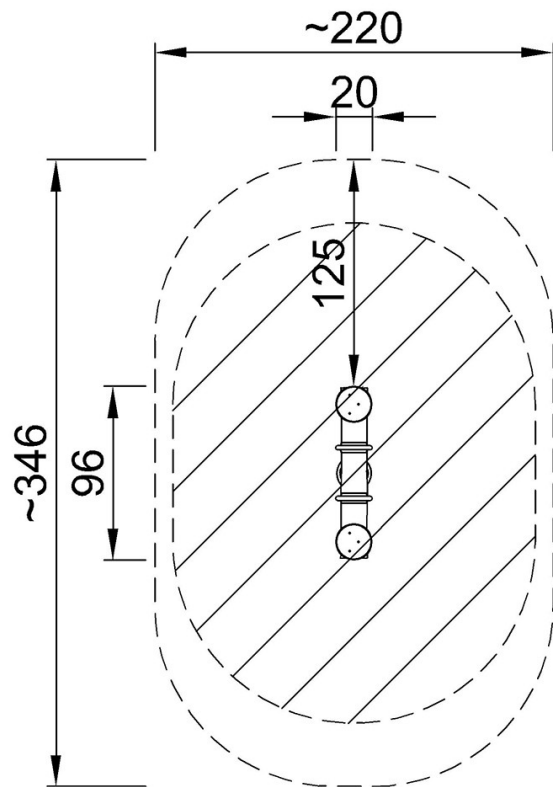

NRO103
*65cm
**61cm
***~6.7m²



NRO103

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)