

Combi 4

FSW104











Compact and complete street workout and dynamic exercises and promote sideways

callisthenics combination for training and competition. It features an incline bench, parallel bars, push up bar, decline press, Swedish ladder, human flagpole and pull up station. Seven workout stations in one, and all within only 41 m². The 138cm wide pull up bars are designed to give plenty of space for

exercises such as the typewriter pull up. The wide bars also allow for users to do pull ups next to each other and thereby compete or motivate each other.

1 / 11/1/2021

Data is subject to change without prior notice.

Combi 4

FSW104






The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



All bars intended for pull ups are made of solid, ø32mm x 138 m, hot dip galvanised, S235JR steel bars. This diameter gives the right grip for everyone.

Item no. FSW10401-0901			
Installation Information			
Max. fall height	23	3 cm	
Safety surfacing area	42,4	4 m2	
Numberofinstallers	2		
Total installation time		8,2	
Excavation volume	0,35 m3		
Concrete volume	0,10 m3		
Footing depth (standard)	90 cm		
Shipmentweight	331 kg		
Anchoring options	In-ground	ground 🗸	
	Surface	~	
Warranty Information			

Hot dip galvanised steel	Lifetime
Post	10 years
Connectors	10 years
EcoCore HDPE	Lifetime
Spare parts guaranteed	10 years



The handles offer 4 different heights to place the hands or feet; 48cm, 76cm, 104cm and 132cm, creating the opportunity to scale the difficulty of the exercise.



Postare made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.



The surface is made of Ekogrip [™] panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip [™] panels have a non-skid effect for comfortable and safe training at all weather circumstances.



Sustainability

Cradle to Gate A1-A3

FSW10401-0901

Total CO₂

emission

kg CO₂e

714,10

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cy cle

Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Recycled

materials

%

46,91

CO₂e/kg


kg CO₂e/kg

3,13



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2021-09-27

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900 (Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023 Validated by:

Boot Hig

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO, calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

Publication date: 15. October 2021

By Bureau Veritas HSE www.bureauveritas.dk






3/11/1/2021


Combi 4

FSW104

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

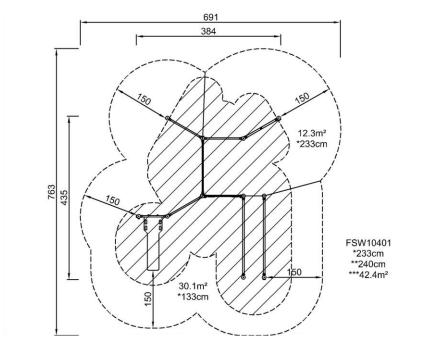

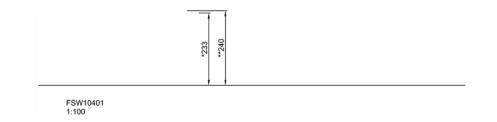

4 / 11/1/2021

Data is subject to change without prior notice.

