


Inclusive Multi Seesaw


PCM162

KOMPANI

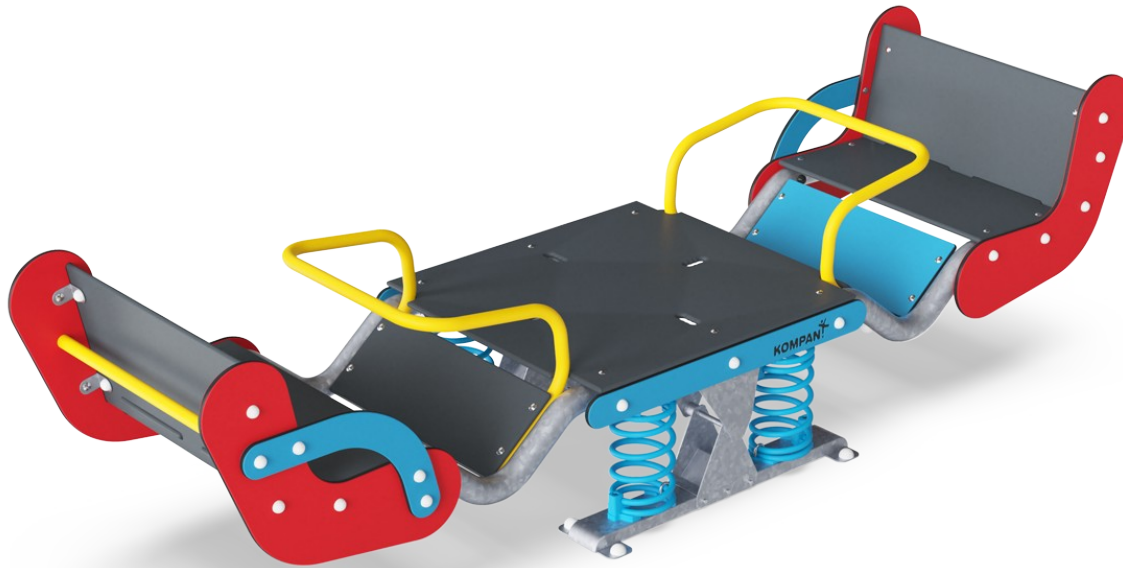

Item no. PCM162-0601

General Product Information

| | |
|-----------------------|---|
| Dimensions LxWxH | 108x349x93 cm |
| Age group | 3+ |
| Play capacity (users) | 10 |
| Colour options |  |



Rocking in big groups is a highly appealing activity which invite children to play, again and again. The colour contrasts of the seesaw, with the yellow handles, are helpful to users with difficulties seeing. The spacious platform and seats of the Inclusive Multi Seesaw, along with the sturdy back and foot support, support children of all abilities in play. The open sides eases the access for

children with difficulties moving, and the side bars support their seated position. The broad seats allow for caretakers to support play. The handle on the rear of the seats invites into play and social interaction the children who are not comfortable with or able to use the seats of the platform of the seesaw. The rocking movement, apart from being great fun, benefits the development of the sense of


balance, the proprioception and strength of users, regardless of whether users are playing the seesaw lying, seated or standing on the platform. These skills help children navigate the surroundings securely and builds confidence in moving. This confidence is crucial also for children's self-confidence and their capacity for social interaction.




Inclusive Multi Seesaw

PCM162

KOMPANI®



Solid foot, calf and back support
Social-Emotional: support intensive rocking and provide assistance to children with movement difficulties and disabilities.

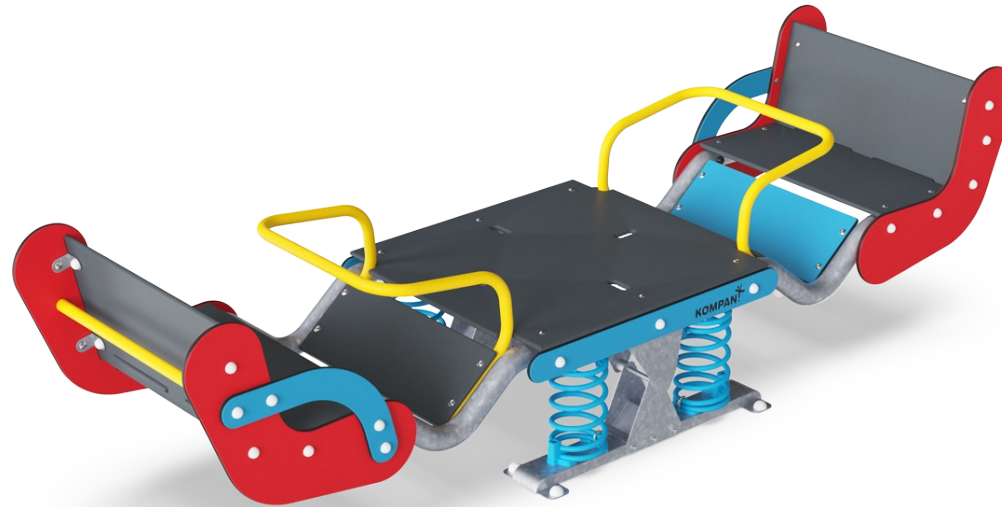


Rocking together
Social-Emotional: the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.



Rocking spring
Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. **Cognitive:** trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Yellow handle
Social-Emotional: improves visibility for users with limited eyesight and invites users who cannot access to participate from the outside, providing social-emotional belonging in play.



Center platform
Physical: supports agility, balance and coordination when standing, using leg and core muscles, building bone density when jumping. Facilitate sitting and lying also, allowing for users with disabilities. **Social-Emotional:** provides an inclusive space. Point for gathering and for care givers assisting. Teamwork and socializing when rocking together.



Yellow support handle
Physical: provide a secure grip, essential for intensive rocking. This helps strengthen hand and arm muscles
Social-Emotional: offer firm grip for users of different sizes, supporting inclusive play. Additionally, the chosen colors offer high visibility, benefiting users with limited eyesight.



Open side
Social-Emotional: offer ease of entry and ease caregiver assistance for children with movement difficulties and movement disabilities.

Inclusive Multi Seesaw

PCM162



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



All floors are made of High Pressure Laminate HPL with a thickness 17.8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The usage of two springs and a center tipping point makes possible for users of different ages to play together. The tipping point bushing is a made of high quality nylon (PA6).



User friendly handles in yellow color with soft curves for firm grip by users & caretakers. Powder coated top finish with great comfort in all weather conditions.

Item no. PCM162-0601

Installation Information

| | |
|--------------------------|--------------------------|
| Max. fall height | 100 cm |
| Safety surfacing area | 19.4 m ² |
| Total installation time | 9.4 hours |
| Excavation volume | 1.49 m ³ |
| Concrete volume | 0.00 m ³ |
| Footing depth (standard) | 62 cm |
| Shipment weight | 340 kg |
| Anchoring options | Surface ✓ In-ground ✓ |


Warranty Information

| | |
|--------------------------|----------|
| EcoCore HDPE | Lifetime |
| Hot dip galvanised steel | Lifetime |
| HPL platform | 15 years |
| Springs | 5 years |
| Spare parts guaranteed | 10 years |

**EN
1176**
compliant

Sustainability Data

PCM162

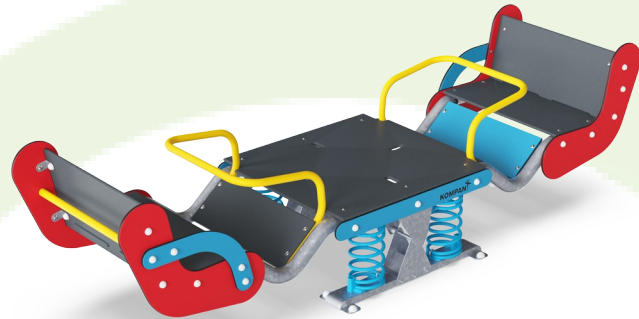

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled material |
|----------------------|--------------------------------|-------------------------|-------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| PCM162-0601 | 1,198.75 | 4.04 | 38.42 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Independent review certificate

Kompan A/S
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO₂e-calculations (covering materials, processing, waste and transport) done by Kompan for "Freestanding Play Equipment", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO₂e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO₂e.

Object

The verification has been done on the one pager "GXY916012-3417" version: 27-10-2025. The supporting documentation "KOMPAN data_updated emissions factors_2025_V2" and "Emissions factors, EPD's and ecoinvent 3.11_2025" was also reviewed and approved.

Declaration

The verification has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO₂e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

Note: This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

Ref.: Kompan_Verification report 2025, 28-10-2025

Date of certificate: 29-10-2025

Expire date: 29-10-2027

Verified by: Julie Marie Vejsgaard Larsen, Environmental Auditor



Signature:

Inclusive Multi Seesaw

PCM162

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

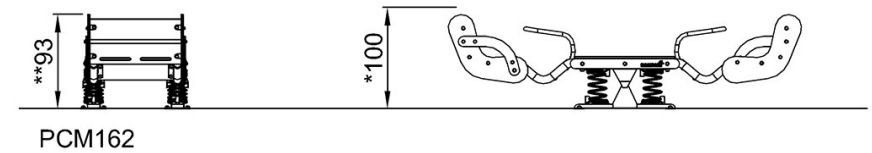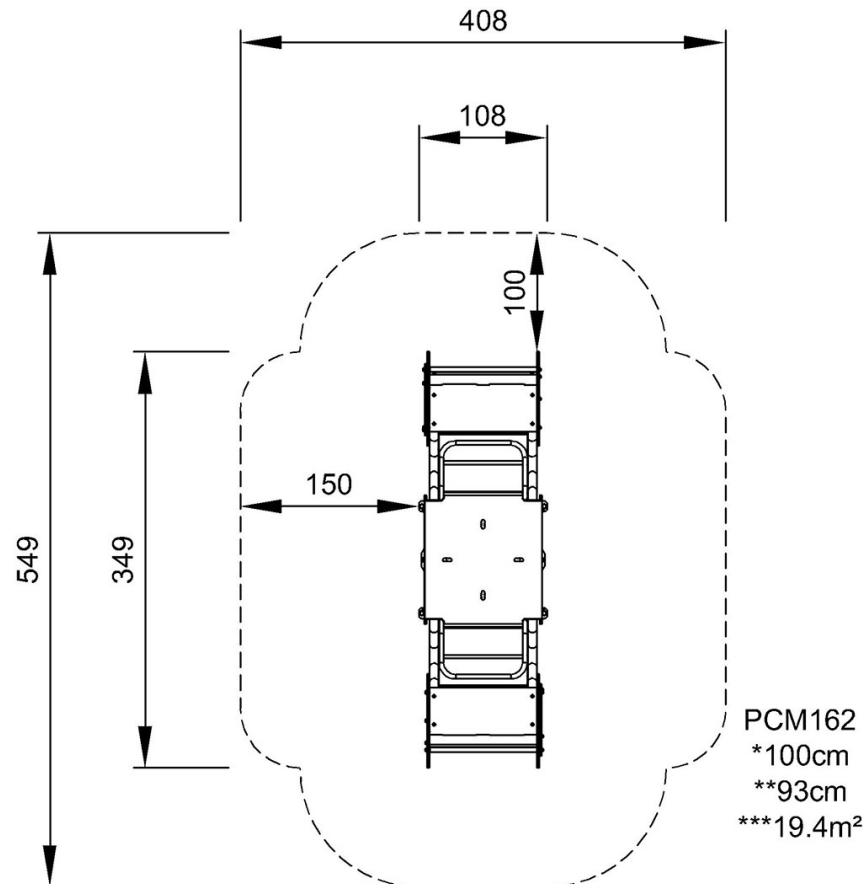

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)