

Playhouse with Angled Roof


KPW40101

KOMPAN!



Item no. KPW40101-0601

General Product Information

Dimensions LxWxH	95x86x153 cm
Age group	6m+
Play capacity (users)	5
Colour options	



The home-themed playhouse will attract toddlers again and again. The scale of the house is perfect for toddlers. The openness over the desk adds to the overall transparency, and children can play together from the outside and the inside of the house. Having a meeting point like the house allows for social

interaction and the desk and bench inspire dramatic play, such as home and shop. Themes like these, which young children recognise, set a frame for mimicking and elaborating on social interaction, training children's understanding of the world. The dramatic play trains communication, language

skills and social skills such as negotiation and empathy. The ground level play makes it possible for all children to play here.



Playhouse with Angled Roof

KPW40101

KOMPANI®



Desk

Social-Emotional: fine meeting place and a space creator. Sharing and cooperation from both sides create a social scenario that supports communication and cooperation.



Transparency

Social-Emotional: the transparency makes possible cooperation and communication throughout, all important life-skills for children to learn.



Bench

Social-Emotional: gathering, cooperating or taking a break from play - all train social skills.



Window

Social-Emotional: invites interaction between sides and cooperative play.



Theme

Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.

Playhouse with Angled Roof


KPW40101



Panels of FSC®-certified (FSC®C004450) pine wood with pressure-impregnated base treatment. Vertical boards and top ends are protected by a unique aluminium profile for high outdoor durability.



Roof of FSC®-certified (FSC®C004450) pine wood with pressure-impregnated base treatment.

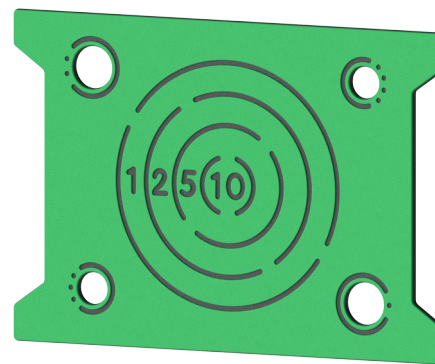

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The main tower posts are available in two types of material: European pine wood posts, pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). Aluminum post t=2mm with anodized surface treatment. Base material EN AW-6060 T66.

Item no. KPW40101-0601	
Installation Information	
Max. fall height	0 cm
Safety surfacing area	12.5 m ²
Total installation time	3.4 hours
Excavation volume	0.30 m ³
Concrete volume	0.00 m ³
Footing depth (standard)	60 cm
Shipment weight	103 kg
Anchoring options	In-ground ✓ Surface ✓
Warranty Information	
Pinewood	10 years
EcoCore HDPE	Lifetime
Aluminum	15 years
Spare parts guaranteed	10 years

**EN
1176**
compliant

Sustainability Data

KPW40101



Cradle to Gate A1-A3

Total CO₂ emission

CO₂e/kg

Recycled material

kg CO₂e

kg CO₂e/kg

%

KPW40101-0601

145.51

1.98

29.21

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Independent review certificate

Kompan A/S
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO₂e-calculations (covering materials, processing, waste and transport) done by Kompan for "Nature Play", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO₂e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO₂e.

Object

The verification has been done on the one pager "NRO40901-0601" version: 27-10-2025. The supporting documentation "KOMPAN data_updated emissions factors_2025_V2" and "Emissions factors, EPD's and ecoinvent 3.11_2025" was also reviewed and approved.

Declaration

The verification has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO₂e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

Note: This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

Ref.: Kompan_Verification report 2025, 28-10-2025

Date of certificate: 29-10-2025

Expire date: 29-10-2027

Verified by: Julie Marie Vejsgaard Larsen, Environmental Auditor


Signature:

Playhouse with Angled Roof


KPW40101

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

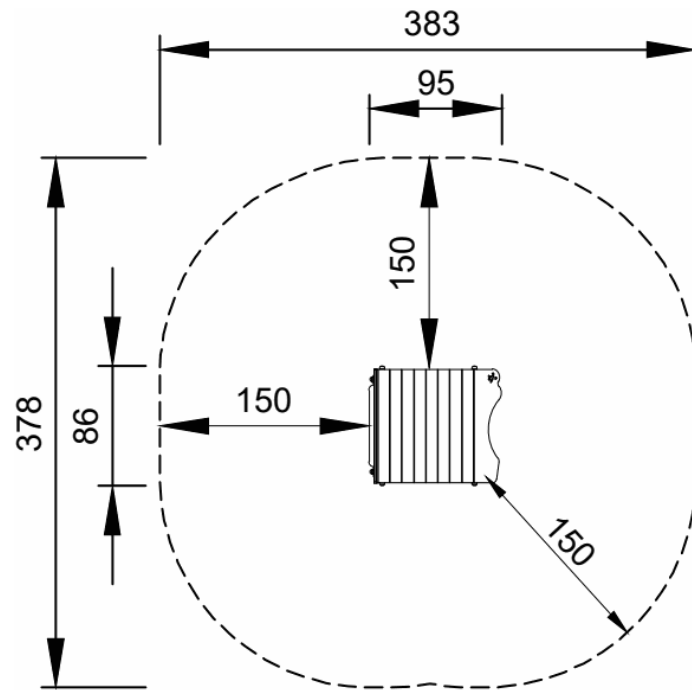

KPW40101
**153cm
***12.5m²
1:100

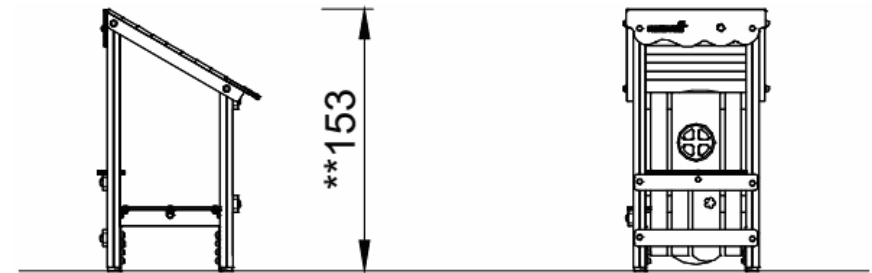

KPW40101
1:100

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)