
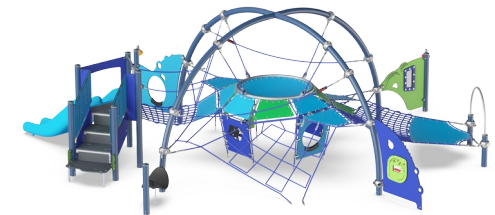
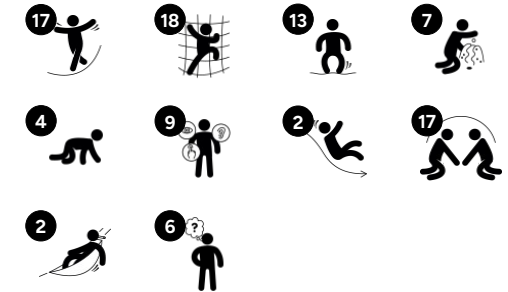


Mini Dome with Slide

CRP810201

KOMPANI

Item no. CRP810201-0903	
General Product Information	
Dimensions LxWxH	750x740x255 cm
Age group	2+
Play capacity (users)	42
Colour options	



Marvelous Mini Dome amazes children with its richness in play variation and detail, again and again. The Dome can be entered from all over: membranes, nets, climbing ropes, and stairs take the toddlers to the top membrane circle. This viewpoint invites friends to meet. Under it, a cozy den is created with varied climb or peep-through membranes that invite play

classics such as peek-a-boo. The panels and hammock around the central nets allow for dramatic play and exploration with sensory details. The slide is a play magnet and completes the play offerings that train motor skills such as balance, coordination and proprioception. These are fundamental in moving the body confidently and securely. The


varied movements additionally instill an understanding of space, shapes, and measures which is fundamental for understanding mathematics. The Mini Dome offers great play capacity, so children learn turn-taking skills through play and make friends that way.



Mini Dome with Slide


CRP810201

KOMPANI®



Inclined net with membrane

Physical: the inclined net supports the upward climbing movement of the body, which stimulates cross-body coordination and muscle strength. The bouncy membrane develops the sense of balance when children jump, stand or sit here. **Social-Emotional:** the big net allows for more children to be active together, seated or lying.

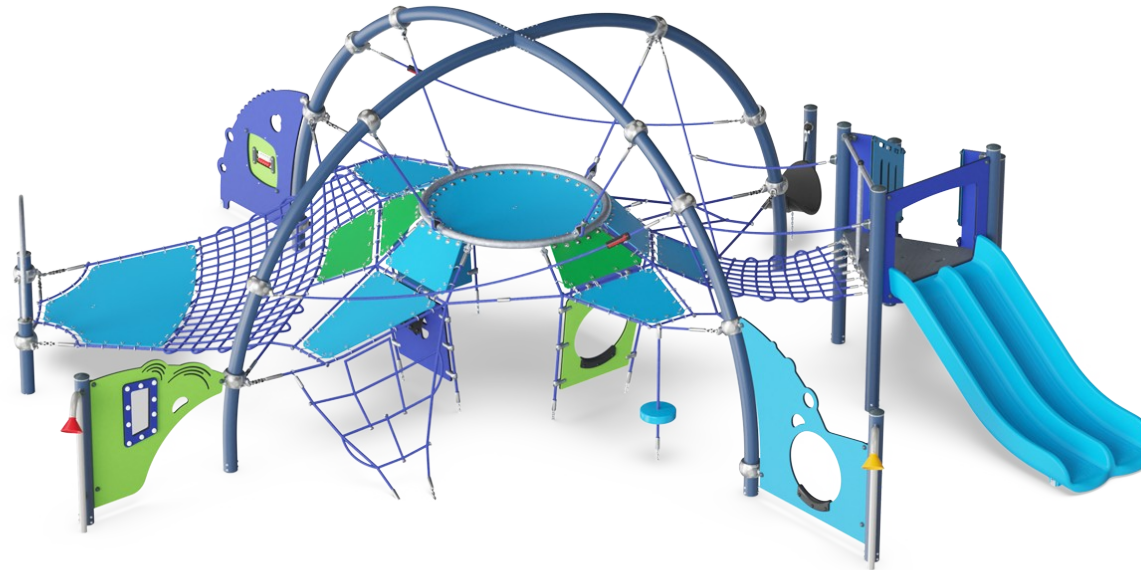

Double slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. **Social-Emotional:** invites socializing, supports parent-child and peer-to-peer play. **Cognitive:** young children train their understanding of space, speed and distances when sliding down quickly.




Mirror

Cognitive: understanding of individuality and self expression. Stimulates dramatic play and thus language and communication development.



Window with curtains

Physical: tactile stimulation supports sensory skills, when children explore characteristics of the materials. **Social-Emotional:** social interaction between inside and outside, supporting turn-taking and cooperation. **Cognitive:** understanding object permanence when playing, e.g. peek-a-boo. Dramatic play support, encouraging language skills. **Creative:** leaving a mark, deciding how to place curtains.



Abacus

Cognitive: supports understanding of measures.



Top circular membrane

Physical: the sense of balance and space is supported when entering the slightly bouncing membrane. This trains the understanding of time, space and measures important in moving the body in securely. **Social-Emotional:** children develop courage when climbing and being up high. This positively affects self-confidence. The top membrane provides a great place to be together with friends.



Crawl-through hole

Physical: the hole allows for climbing and crawling through, developing cross coordination, proprioception and spatial awareness. **Social-Emotional:** cooperation and turn-taking when passing one another. **Cognitive:** understanding space, shape and measures when seeing if the body can fit through the hole.

Mini Dome with Slide

CRP810201



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The steel arches are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



The slides can be chosen in six different colors and two materials: Molded PE slides made with 33% post consumer materials or full stainless steel in one-piece design for more vandalism proof solutions.



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The EcoYarn™ polyester yarn is made of +95% post-consumer recycled waste in the yarn for all colors and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.

Item no. CRP810201-0903


Installation Information

Max. fall height	127 cm
Safety surfacing area	73.1 m ²
Total installation time	36.6 hours
Excavation volume	9.16 m ³
Concrete volume	4.77 m ³
Footing depth (standard)	90 cm
Shipment weight	987 kg
Anchoring options	In-ground ✓ Surface ✓

Warranty Information

EcoCore HDPE	Lifetime
Hot dip galvanised steel	Lifetime
Corocord rope	10 years
Hollow PE parts	10 years
Spare parts guaranteed	10 years



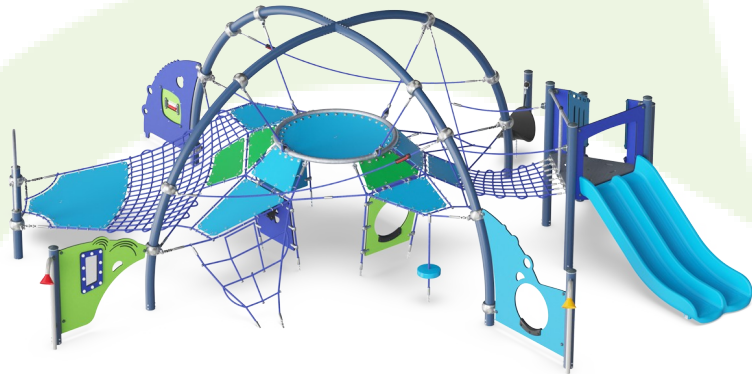

Independent review certificate

Kompan A/S
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO₂e-calculations (covering materials, processing, waste and transport) done by Kompan for "Corocord", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO₂e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emission are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO₂e.

Object

The verification has been done on the one pager "CRP302501-1101" version: 27-10-2025. The supporting documentation "KOMPAN data_updated emissions factors_2025_V2" and "Emissions factors, EPD's and ecoinvent 3.11_2025" was also reviewed and approved.

Declaration

The review has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO₂e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

Note: This review only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

Ref.: Kompan_Verification report 2025, 28-10-2025

Date of certificate: 29-10-2025

Expire date: 29-10-2027

Verified by: Julie Marie Vejsgaard Larsen, Environmental Auditor

Signature:

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled material
	kg CO ₂ e	kg CO ₂ e/kg	%
CRP810201-0903	3,700.81	4.97	52.13



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Mini Dome with Slide

CRP810201

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

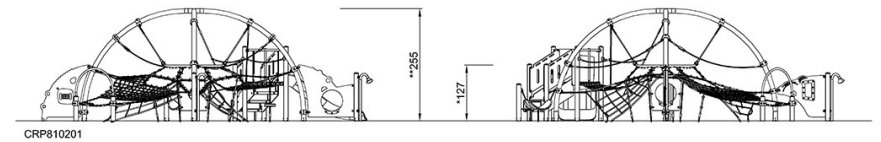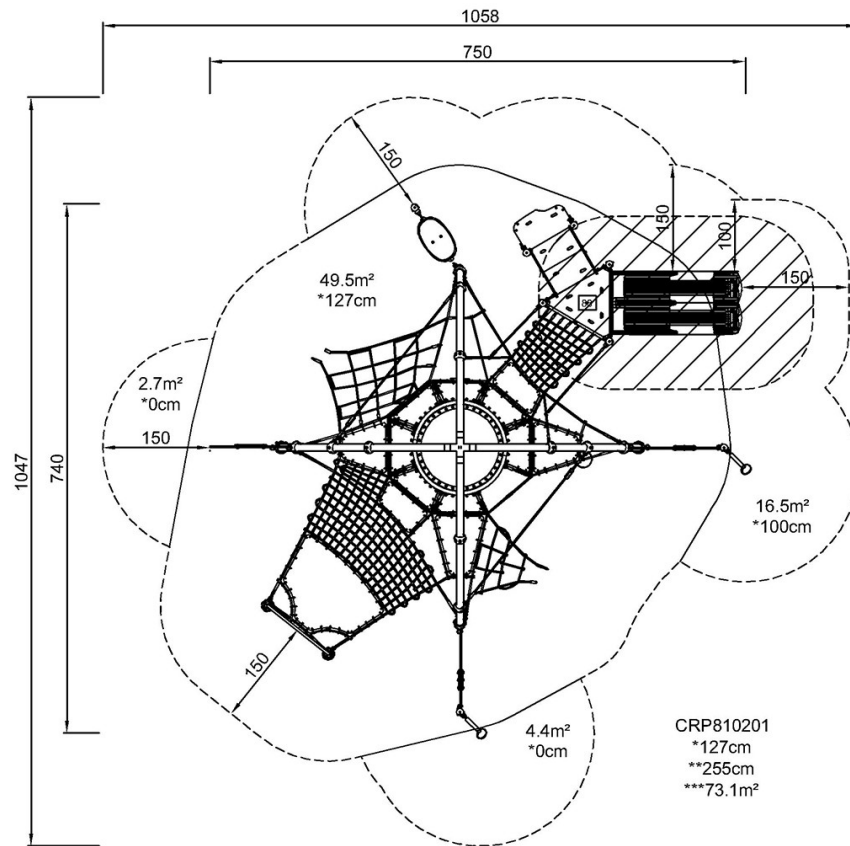

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)