

# Combi 5

FSW105

**KOMPAN**<sup>®</sup>

Item no. FSW10502-0901

## General Product Information

Dimensions LxWxH 695x444x240 cm

Age group 13+

Capacity (users) 14

Colour options 



See KOMPAN Fit app for more



With 10 different workout stations in one, this combination package offers a superior street workout and callisthenics experience. Featuring all the essential elements for users to release their creativity, the dimensions of the pull-up bars have been optimised to 32mm for the best possible hand grip. The strength of the bar is secured through a conical design and a full

steel bar. The 138cm wide pull-up bars are designed to give plenty of space to dynamic exercises and promote sideways exercises such as the typewriter pull-up. The wide bars also allow users to do pull-ups next to each other and thereby compete or motivate each other. The Universal Parallel Bars allow for users of all capabilities to work on dips and stretch

exercises with a wider entrance on one side for wheelchair users.



Data is subject to change without prior notice.

# Combi 5


FSW105



The Dip-Station is designed with inclusive in mind, allowing wheelchair users to access the bars at either end. The two bars are placed at two different widths and heights – one narrow and high and one wide and low to allow for training of different individuals and muscle groups.



Steps are made of extruded aluminium with a non-skid surface. Aluminium has high corrosion resistance and ensures durability of the product. Steps have been mounted at heights of 34,7cm and 54,7cm this creates an easy access to reach the overhead activity

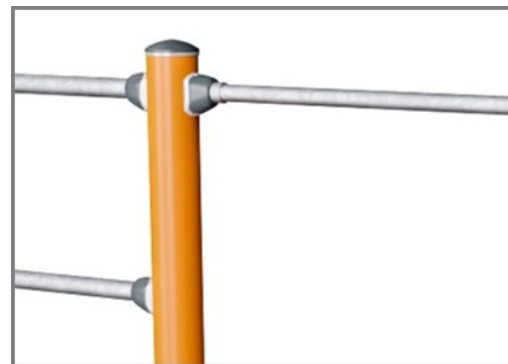

All bars intended for pull ups are made of solid,  $\varnothing 32\text{mm} \times 138\text{m}$ , hot dip galvanised, S235JR steel bars. This diameter gives the right grip for everyone.



The handles offer 4 different heights to place the hands or feet



Post are made of  $\varnothing 101.6 \times 2\text{mm}$ , pre-galvanized carbon steel and powder coated, a great protection to all conditions.



The surface is made of Ekogrip™ panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip™ panels have a non-skid effect for comfortable and safe training at all weather circumstances.

Item no. FSW10502-0901

### Installation Information

Max. fall height	133 cm
Safety surfacing area	62.1 m <sup>2</sup>
Total installation time	11.6 hours
Excavation volume	1.39 m <sup>3</sup>
Concrete volume	0.72 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	674 kg
Anchoring options	In-ground ✓ Surface ✓


### Warranty Information

Hot dip galvanised steel	Lifetime
Post	10 years
Connectors	10 years
EcoCore HDPE	Lifetime
HPL panel	15 years



# Sustainability Data

FSW105

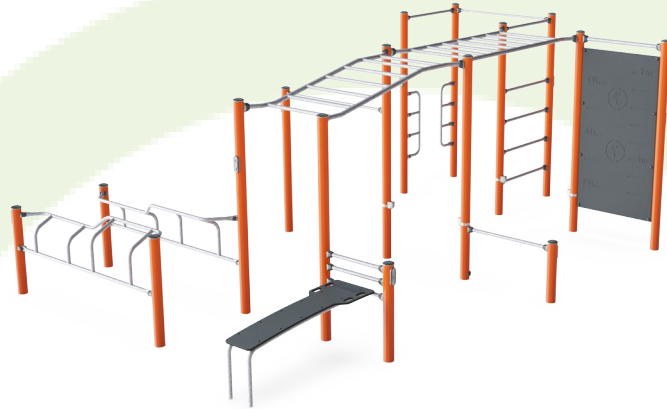

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled material
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>FSW10502-0901</b>	1,517.66	3.41	57.12

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



## Independent review certificate

Kompan A/S  
C. F. Tietgens Blvd. 32C, 5220 Odense SØ

Bureau Veritas hereby attests that the CO<sub>2</sub>e-calculations (covering materials, processing, waste and transport) done by Kompan for "Fitness", meet the requirements set by the listed standard.

Kompan A/S uses a selection of EPDs and emission factors from the Life Cycle Assessment database Ecoinvent 3.11. These values are reported as kg CO<sub>2</sub>e, with all other impact categories excluded in line with the scope of ISO 14067:2018. The emission factors cover, material use, manufacturing processes, transport to Kompan, and electricity used during manufacturing. The presented emissions fall under GHG Protocol scope 3 emissions. Scope 1 and 2 are not presented. Scope 3 emissions include emission sources in the upstream value chain of a company, downstream emissions are excluded in this analysis.

Method: ISO 14067:2018 using GHG protocol guidance documents, reported as kg CO<sub>2</sub>e.

### Object

The verification has been done on the one pager "FAZ10100-0900" version: 27-10-2025. The supporting documentation "KOMPAN data\_updated emissions factors\_2025\_V2" and "Emissions factors, EPD's and ecoinvent 3.11\_2025" was also reviewed and approved.

### Declaration

The review has been completed as a critical review with a limited assurance. I hereby confirm that nothing has come to the reviewer's attention which would lead to conclude that the study does not give an accurate depiction or isn't completed following method of the CO<sub>2</sub>e calculation, the requirements of ISO 14067:2018, and 14071:2024, in the above referenced documentation.

**Note:** This verification only covers calculation elements according to method described in ISO 14067:2018 and may not be seen as a Life Cycle Assessment according to ISO 14067:2018.

**Ref.:** Kompan\_Verification report 2025, 28-10-2025

**Date of certificate:** 29-10-2025

**Expire date:** 29-10-2027

**Verified by:** Julie Marie Vejsgaard Larsen, Environmental Auditor


**Signature:**

# Combi 5


FSW105

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

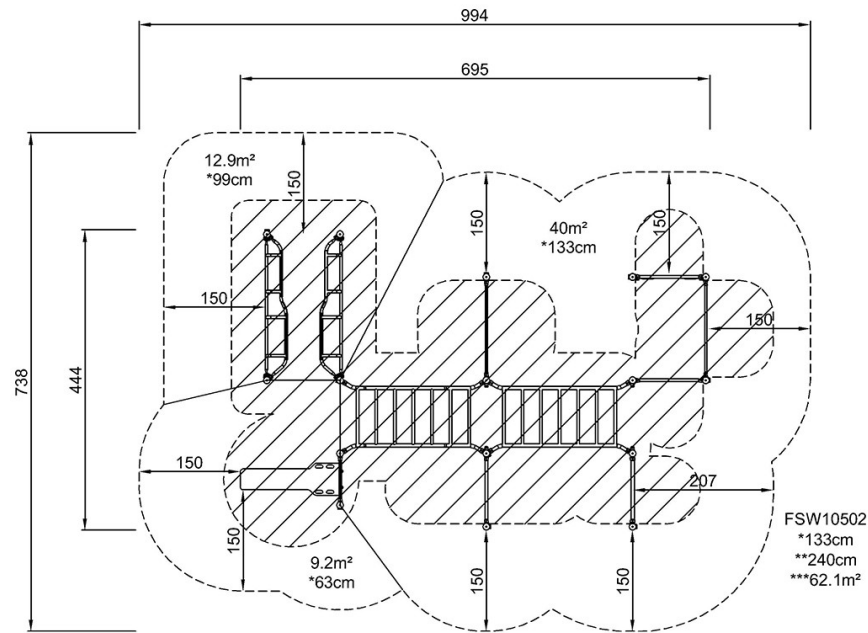

FSW10502  
\*133cm  
\*\*240cm  
\*\*\*62.1m²

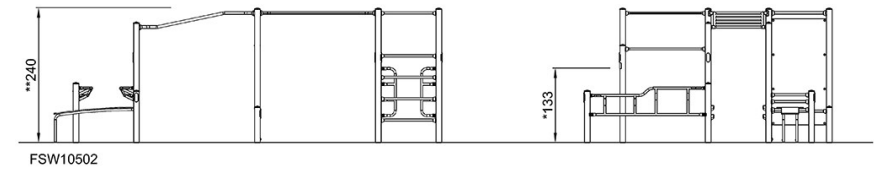

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)